

CORPORATE OFFICE:

Asian Granito India Ltd.

202, Dev Arc, Opp. Iskon Temple, S.G. Highway, Ahmedabad - 380015. Gujarat, INDIA.

Ph.: +91 79 6612 5521 | Fax.: +91 79 6612 5600 | Email.: contact@bonzer7.com, info@bonzer7.com


www.bonzer7.com | Toll Free No.: 1800 123 4475









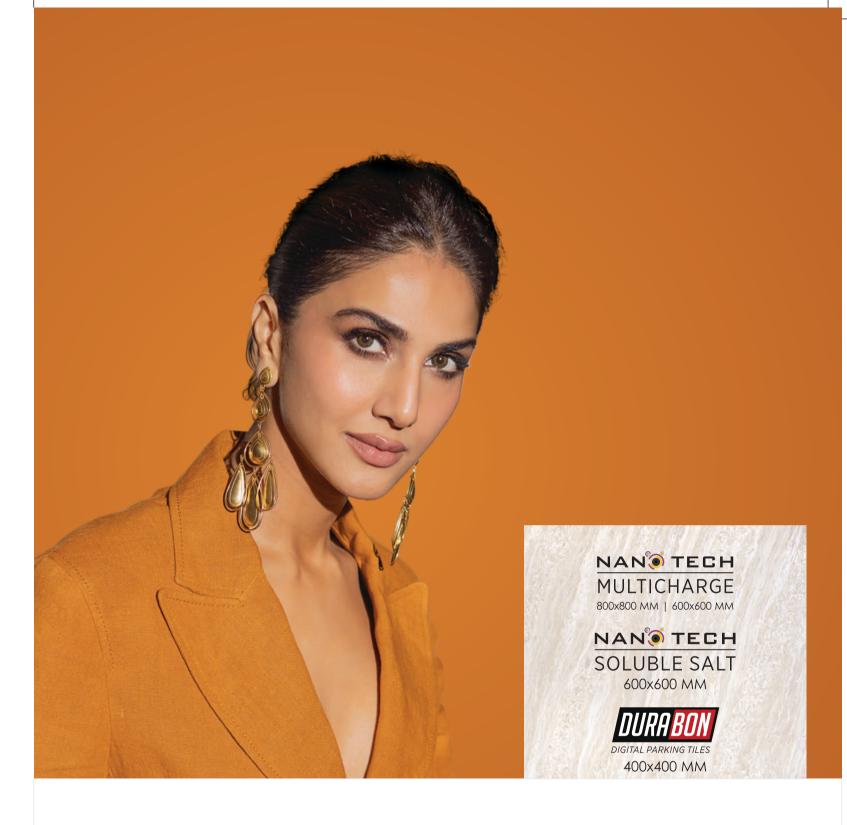







About Us

With our unvarying focus towards creating a comprehensive collection of formidable products and exceptional service, we have fast become one of the front-runners in the ceramic space. We aspire to use our expertise and ardor to turn your dreams into reality.

We are always striving to upgrade our technology to manufacture superior products. At Bonzer7, we follow the adage 'Inspired By You'. It is a priority for us to meet the expectations of our customers fittingly. Our efforts are directed towards providing our customers new designs with unmatched quality.

A testament to our 'customer first approach' is our happy customers. We have become the preferred brand of country's prime architects, interior designers, custom home builders, developers and astute homeowners in a short span of time.

CRAFTING MAGNIFICENT CERAMIC ARTISTRY




























Certificate







ISO 9001 : 2015



BIS CERTIFIED



CE CERTIFIED




CERTIFIED TWO STAR EXPORT HOUSE



GRIHA CERTIFIED



IIID CERTIFIED



AWARDED FOR BRAND LEADERSHIP



IGBC CERTIFIED

Bonzer7 has prioritized quality in all its endeavors and the same has been recognized by authorities. We have received certain certifications that boast our adherence to market standards and established procedures. We are also the proud recipients of "Power Brands Rising Star" a recognition bestowed upon us Indian customers.

PRESTIGIOUS PROJECT

Bonzer 7 is focused to increase its reach in retails segment. There are requirements from various customers and they have unique approach towards brands. We have been supplying our offering to many prestigious projects to fulfill different requirements.





INDIVIDUAL VILLAS

M/s. Ananya Shelters (P) ltd. KTVR Vijaydeepa Constructions M/s. JRD Realtors-Builders Sri Mahalakshmi Construction





APARTMENTS

Sri Gujan Property Devlopers M/s. JRD Realtors-Builders Kedar Ventures, Promoters GMS Elegant Builders (I) PVT Ltd.





THEATRE COMPLEX

Karpagam Cine Complex



IT TECH PARK

India Land Tech Park PVT Ltd.






onec

HOSPITAL

Hospital Building : KG Hospital Ar. Sankar & Associates

























DISPLAY CENTER















Corporate Office: - Asian Granito India Ltd.

202, Dev Arc, Opp. Iskcon Temple, SG Highway, Ahmedabad – 380015. Gujarat, India Ph.: **+91 79 66125500/698/659**

Email: info@bonzer7.com

Bonzer7 Tiles - Company Display Centre

Chennai 10/2, Plot No. 19, New Survey No. 52/1, 2nd Floor, Jawaharlal Nehru Salai, Inner Ring Road, Koyambedu, Chennai, Tamilnadu, 600107.

M: 99090 37685

Email: chennaishowroom@bonzer7.com

Bonzer7 Tiles - Company Display Centre

Ahmedabad Gota Cross Road,

Nr. Sarkhej - Gandhinagar Highway, Gota, Ahmedabad – 382481


M: 75068 22059

Email: ahdshowroom@bonzer7.com

Bonzer7 Tiles - Company Display Centre

Hyderabad #8-2-293/K, Srimam Chambers, 2nd Floor, Kamalapuri Colony, Phase –III, Hyderabad – 500073.

M: 80085 03671/72 | 99799 91861

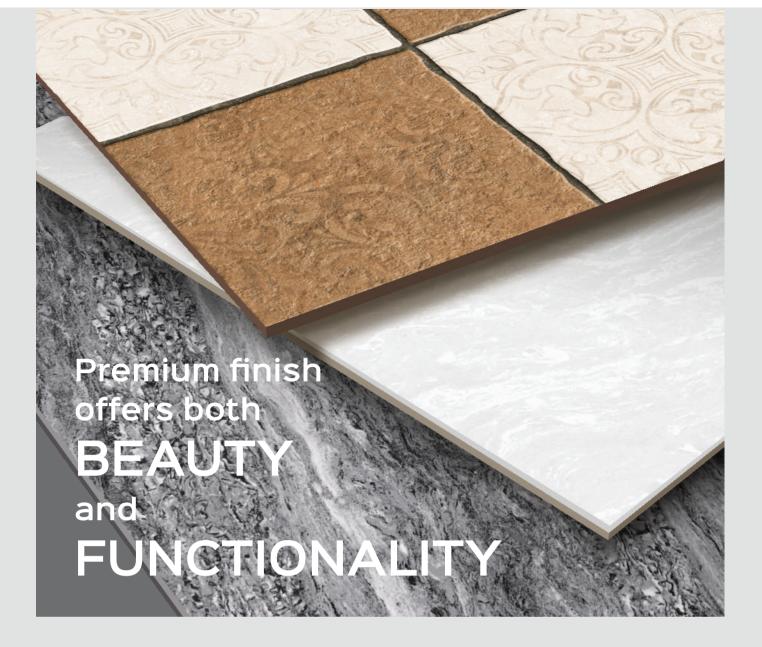

FEATURES









Ecology &





Resistance to Staining



Frost Resistance



Break Resistance



Thermal Shock Resistance



Easy to

The pride of your space when it comes to giving a touch of grandeur to a space. We have multiple applications for indoor & outdoor spaces. Our exceptional surface are widely used to adorn the walls & embellish the floor of your spaces.

APPLICATION



Airport

Terminal











Schools Domestic Offices







Industries Discotheques




Shopping

Malls
















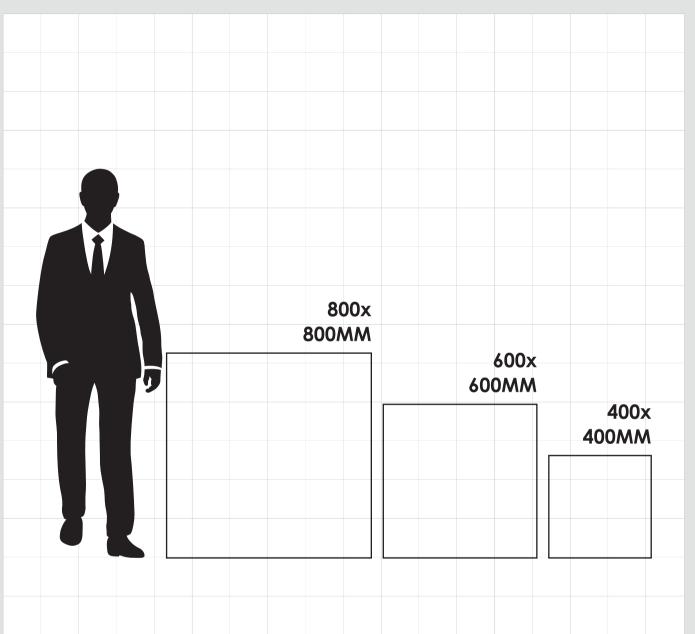


400x400 MM

Glossy tiles have shiny surfaces and have an enamel coating that reflects light. Glossy tiles are ideal for small areas, as they make any area look brighter and more spacious... These tiles are available in 800x800mm, 600x600 and 400x400mm.

Punch and Plain tiles are perfect for imparting a traditional look to any space. Frost and Vogue tiles are a preferred material for outdoor applications due to their anti-slip feature and durability.





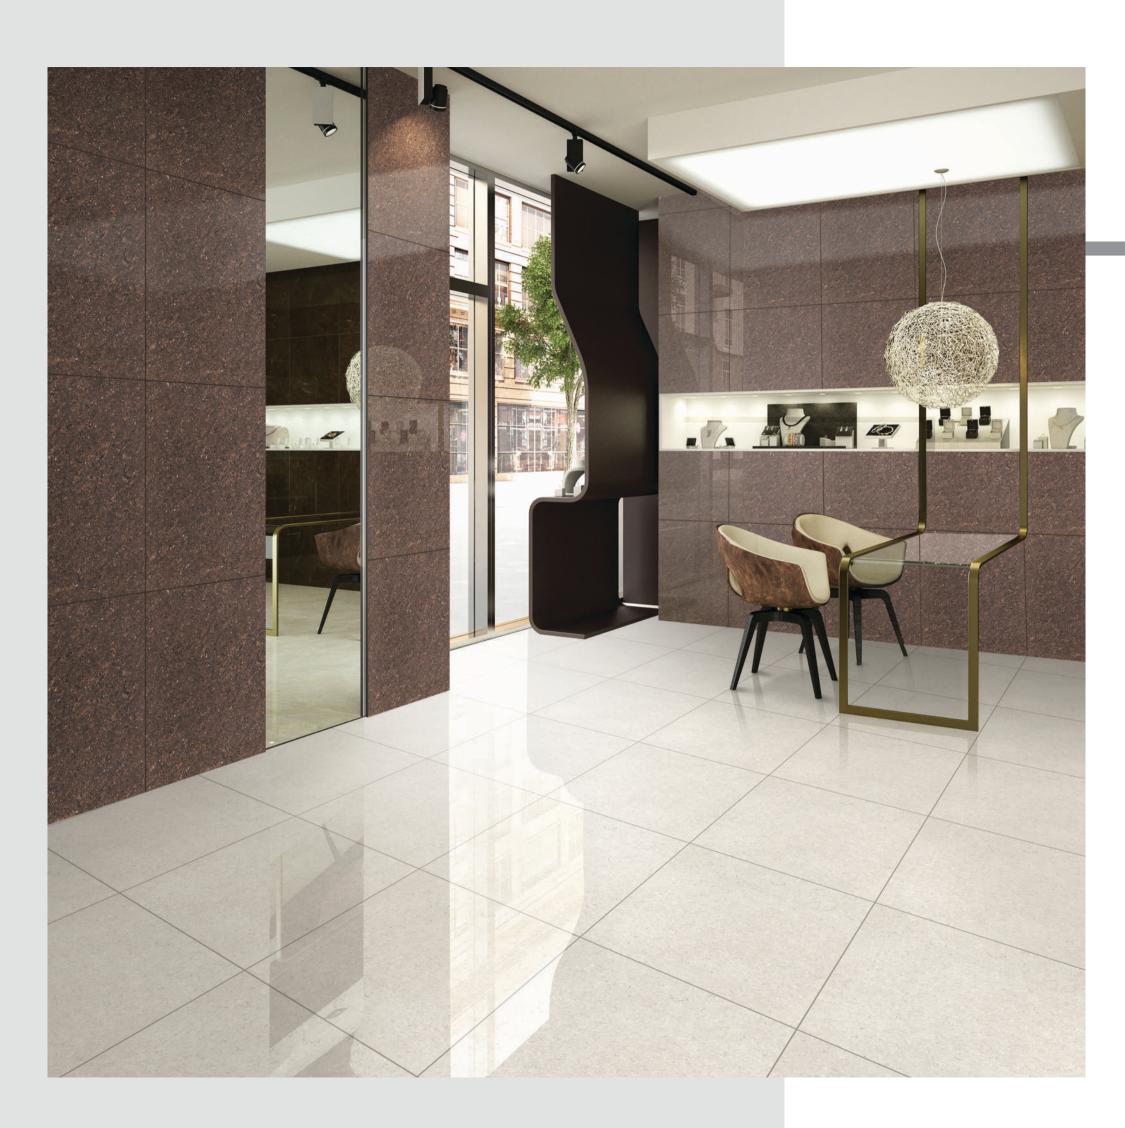

NAN® TECH
MULTICHARGE

800x800MM

Glossy _____ - 08

600x600MM

Glossy _____ _ 10

NAN® TECH SOLUBLE SALT

600x600MM

Glossy ______16



400x400MM

Punch	 - 20
Plain	24

03	FINISHES	
81	DESIGN	







The completeness of the designs matches the vigour of your spaces. It is perfectly made for your comfort and to keep up with your idea of a complete home.

800x800 MM



















360



SHINE WHITE - SP VENEZIA collection

360










SHINE FIRE - SP VENEZIA PLUS collection





















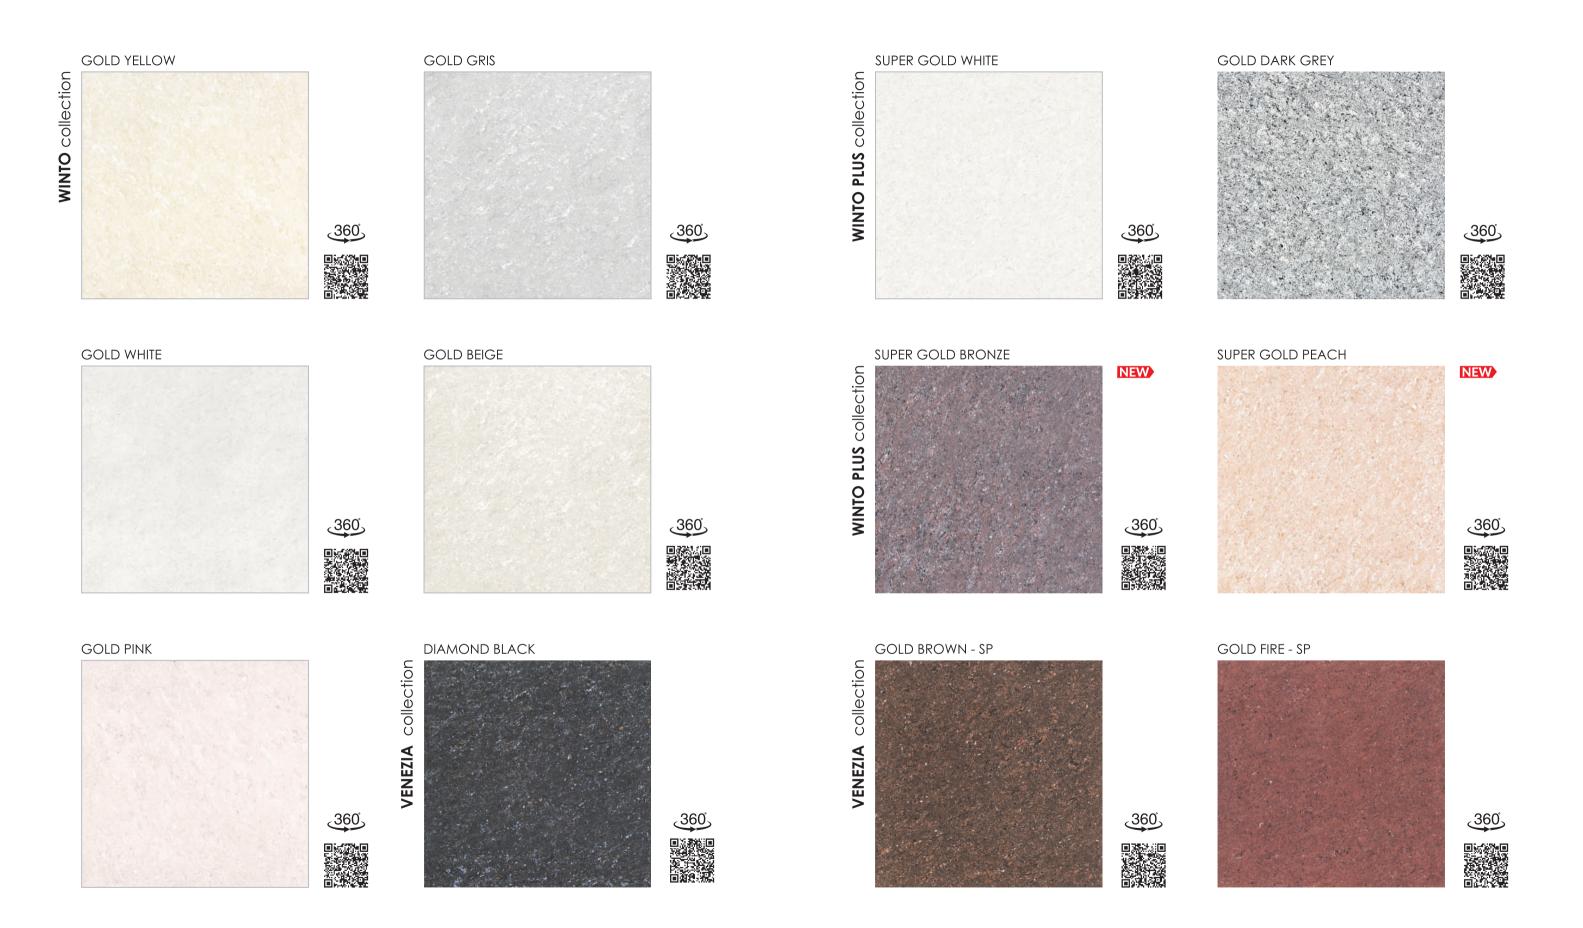

12 | 13








One of the main reasons why ceramic tiles are so popular is their durability. They are made from a mixture of clay, sand, and other natural materials, which are then fired at high temperatures. 600x600 MM



WINTO

Collection



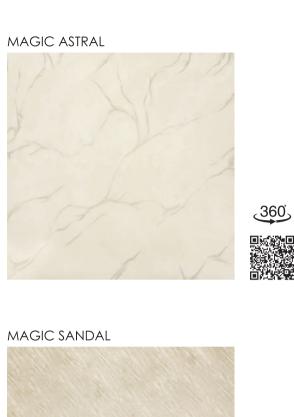



































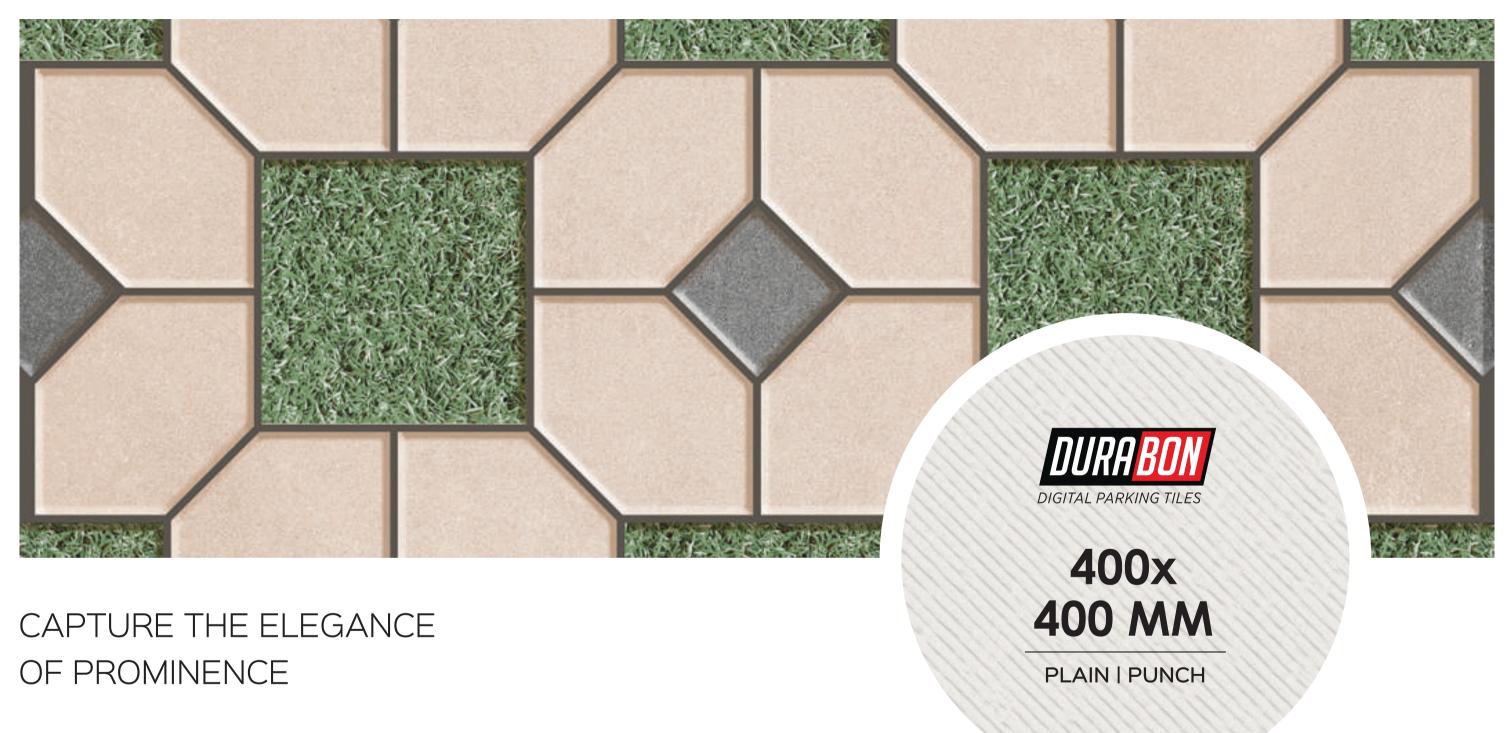

This process makes ceramic tiles extremely hard and durable, and they can withstand heavy foot traffic, spills, and stains. Get introduced to the intrinsic collection from Bonzer7 Tiles and feel the strength and power of the tiles for your interiors.

RUSTIC Finish

400x400 MM

PUNCH

WINTO COLLECTION















PRADA MOSAIC







ROUGH STONE GREY





RECTO STONE BROWN











ABRIL NERO

360

BRINZO GREY







RANGER NERO

360



360



20 | 21

400x400 MM **PUNCH**



WINTO


Collection



LITORAL BIANCO



LITORAL GREY





FLAIX GREY

360


360

360






SAND STONE GREY







HELMER GREY



FENESTA CREMA



STONE QUBE



360



PETRA NERO



PAVILLION BIANCO

PETRA BROWN

SPINAL BROWN



STAR WOOD



FLUX MULTI

360



FLUX TEAK WOOD



PAVILLION GREY



360





360

PROVENZA BROWN



CORIA CREMA



CORIA BROWN






BLING BROWN



BLING BLACK





360

RUSTIC Finish

400x400 MM

PUNCH



MULTISTONE BROWN








MULTISTONE GREY

360

TREVER BROWN





360

SPELLO BIANCO



360




<u>360</u>

PLAIN

PLAIN










FEBRICAL SQUAR

PLAIN





DEVIN BROWN

TREVER GRIS





PLAIN

PLAIN





→ 25

MULTICHARGE & SOLUBLE SALT TILES

800x800MM | 600x600MM

TECHNICAL SPECIFICATION

CHARAC	TERISTICS				
DIMENSIO	N & SURFACE QUALITY	Requirement as per ISO 13006:2012 Gr Bla Eb≤0.5%	Requirement as per IS 15622:2017 Gr Bla E≤0.08%	BONZER7 Value	Test Method
j ≡ Devia	ation In Length & Width	± 0.6%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1
P Devia	ation In Thickness	± 5.0%	± 5.0%	± 3.0%	ISO 10545 Part- IS 13630 Part-1
Strai	ghtness of Edge	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part- IS 13630 Part-1
Recta	angularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part- IS 13630 Part-1
→- Surfa	ace Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545 Part- IS 13630 Part-1
🐔. Wate	er Absorption % By Wt.	≤ 0.5, Ind 0.6 Max.	≤ 0.08, Ind. 0.1 Max.	≤ 0.05%	ISO 10545 Part- IS 13630 Part-2
⊀ Flexu	ural Strength (MOR) In N/mm²	Avr.35, Ind. Min. 32	Avr.35, Ind. Min. 32	≥40 N/mm²	ISO 10545 Part- IS 13630 Part-6
3 Breal	king Strength in N	1300 N Min.	1300 N Min.	> 2000 N	ISO 10545 Part- IS 13630 Part-6
Ů Bulk	Density (gm/cc)	2.0 Min.	2.2 Min.	≥ 2.2	ISO 10545 Part- IS 13630 Part-2
1 Impa	act Resistance	> 0.40	> 0.55	> 0.55	ISO 10545 Part- IS 13630 Part-1
Resis	stance to Deep Abrasion	175mm³ Max.	140mm³ Max.	≤120mm³	ISO 10545 Part- IS 13630 Part-1
# Ther	rmal Shock Resistance	10 cycle Min.	10 cycle Min.	No Damage after 10 cycles	ISO 10545 Part- IS 13630 Part-5
♦ Mois	sture Expansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Part- IS 13630 Part-3
☼ Frost	t Resistance	Resistance	Resistance	Resistance	ISO 10545 Part- IS 13630 Part-1
<u></u> ✓ Moh'	'S Scratch Hardness	Min. 5	Min. 5	Min. 5	EN 101 IS 13630 Part-1
A Resis	stance To House hold Chemicals	No Damage	Min Class AA	Class AA	ISO 10545 Part- IS 13630 Part-8
	stance To Acids & Alkalis ept HF Acid)	No Damage	Min Class AA	Class AA	ISO 10545 Part- IS 13630 Part-8
	n Resistance	Min Class 3	Min Class 1	Resistance	ISO 10545 Part-1 IS 13630 Part-8

MULTICHARGE PACKING DETAILS:

Size. (MM)	Thickness	Weight (Kg.)	No. Of Tiles/set	Area Sq.mtr/box		
800x800mm	8 mm	35.50 kg.	3	1.92m²		
600x600mm (Winto & Winto Plus Series)	7.7 to 8 mm	25 to 25.6 kg.	4	1.44m²		
600x600mm (Venezia & Venezia Plus Series)	7.40 to 7.8 mm	23 to 23.2 kg.	4	1.44m²		

SOLUBLE SALT PACKING DETAILS:

Size. (MM)	Thickness	Weight (Kg.)	No. Of Tiles/set	Area Sq.mtr/box
600x600mm	7.3 to 7.7 mm	22 kg.	4	1.44m²

APPLICATION

*Notes:

All technical specifications in this catalogue are for premium grade material only.

\$\text{AHADE/SIZE VARIATIONS}\$ are inherent characteristics of ceramics. Certain products purposely have variations which are part of design & process. The same have been indicated.

It is recommended to blend tiles by mixing tiles from various boxes & check for natural hue before fixing the tiles.

It is recommended to check the tiles before laying/fixing. Quality standards cover only 1st/premium quality only.

Company's liability is limited to material that has not been laid.

NO COMPILIANT SHALL BE ENTERTAINED ON TILES ALREADY FIXED/LAID.

The liability is also limited to the material supplied by the company no after claim is entertained under any circumstances.

- The liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
 No complaint is entertained on decoration done on tiles, other than the ones done by BONZER 7 TILES

GENERAL NOTE: ANY COMPLAINT MUST BE BROUGHT TO THE COMPANY'S NOTICE WITHIN 10 DAYS OF PURCHASE & BEFORE FIXING OF TILES.

How to avoid defects & complaints

- Use good quality Tiles
- Choose good quality Tiles, with proper consideration to area intended of usage.
- Avoid careless laying of Tiles
 Avoid poor maintenance-for instance, by cleaning with strong
- chemicals or with abrasive equipment e.g. metallic scrubber
- Always keep Tiled area clean & ensure dusting/mopping regularly . Put Doormats/Foot-mats at all strategic locations to avoid loose
- debris/dust from entering the Tiled area

DISCLAIMER: Bonzer 7 Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors. All complaints need to be reported within 10 days of purchase. Always follow instructions to avoid complaint due to bad masonry.

DIGITAL PARKING TILES

400x400MM



CHARACTERISTI	CHARACTERISTICS					
(A) DIMENSION & :	SURFACE QUALITY	Requirement as per ISO 13006:2012 Gr Bla Eb≤0.5%	Requirement as per IS 15622:2017 Gr Blb 0.08% ≤E<3.0%	BONZER7 Value	Test Method	
i Deviation In L	ength & Width	± 0.6%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1	
Deviation In T	hickness	± 5.0%	± 5.0%	± 3.0%	ISO 10545 Part-2 IS 13630 Part-1	
Straightness	of Edge	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1	
■ Rectangularity	l	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1	
>- Surface Flatno	ess	± 0.5%	± 0.5%	± 0.2%	ISO 10545 Part-2 IS 13630 Part-1	
🐔. Water Absorp	tion % By Wt.	≤ 0.5, Ind 0.6 Max.	0.08%≤E≤3.0, Ind 3.3 Max.	≤ 0.5	ISO 10545 Part-3 IS 13630 Part-2	
★ Flexural Stren	gth (MOR) In N/mm ²	Avr.30, Ind. Min. 27	Avr.30, Ind. Min. 27	≥35 N/mm²	ISO 10545 Part-4 IS 13630 Part-6	
Breaking Stre	ngth in N	1300 N Min.	1100 N Min.	> 1800 N	ISO 10545 Part-4 IS 13630 Part-6	
Resistance to	Surface Abrasion	Manufacturer to State Class	PEI II Min	Min.PEI IV	ISO 10545 Part-7 IS 13630 Part-11	
₩ Thermal Shoo	ck Resistance	10 cycle Min.	10 cycle Min.	No Damage after 10 cycles	ISO 10545 Part-9 IS 13630 Part-5	
Moisture Expa	ansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Part-10 IS 13630 Part-3	
Crazing Resis	tance	Required	4 Cycle at 7.5 bar Min.	Resistance	ISO 10545 Part-11 IS 13630 Part-9	
♣ Frost Resistar	nce	Resistance	Resistance	Resistance	ISO 10545 Part-12 IS 13630 Part-10	
Moh'S Scratce ✓ Moh'S Scratce	ch Hardness	Min. 5	Min. 5	Min. 7	EN 101 IS 13630 Part-13	
Resistance To	House hold Chemicals	No Damage	Min Class AA	Class AA	ISO 10545 Part-13 IS 13630 Part-8	
Resistance To (Except HF Ac	Acids & Alkalis cid)	No Damage	Min Class AA	Class AA	ISO 10545 Part-13 IS 13630 Part-8	
🚨 Stain Resistar	псе	Min Class 3	Min Class 1	Class 1	ISO 10545 Part-14 IS 13630 Part-8	

PACKING DETAILS:

Size. (MM)	Thickness	Weight (Kg.)	No. Of Tiles/set	Area Sq.mtr/box
400x400mm	10.8 TO 11.2 mm	18.7 Kg.	5 Pcs	0.80 M ²

*Notes:

- All technical specifications in this catalogue are for premium grade material only.
- SHADE/SIZE VARIATIONS are inherent characteristics of ceramics. Certain products purposely have variations which are part of design & process. The same have been indicated.
- It is recommended to blend tiles by mixing tiles from various boxes & check for natural hue before fixing the tiles.
 It is recommended to check the tiles before laying/fixing. Quality standards cover only 1st/premium quality only.
- . Company's liability is limited to material that has not been laid.
- NO COMPLIANT SHALL BE ENTERTAINED ON TILES ALREADY FIXED/LAID.
- . The liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances
- No complaint is entertained on decoration done on tiles, other than the ones done by BONZER 7 TILES

GENERAL NOTE: ANY COMPLAINT MUST BE BROUGHT TO THE COMPANY'S NOTICE WITHIN 10 DAYS OF PURCHASE &

How to avoid defects & complaints :

- Use good quality Tiles
- Choose good quality Tiles, with proper consideration to area
- intended of usage.
- Avoid careless laying of Tiles
- Avoid poor maintenance-for instance, by cleaning with strong chemicals or with abrasive equipment e.g. metallic scrubber
- Always keep Tiled area clean & ensure dusting/mopping regularly
- · Put Doormats/Foot-mats at all strategic locations to avoid loose
- debris/dust from entering the Tiled area

DISCLAIMER: Bonzer 7 Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors. All complaints need to be reported within 10 days of purchase. Always follow instructions to avoid complaint due to bad masonry.